Drawings Prepared For:

BUFFALO RUN

SQFT Schedule.	
Area	Name
1460 SF	LIVING SPACE
404 SF	GARAGE
72 SF	FRONT PORCH
253 SF	BACK PORCH

Cabinetry Length
Width
41' - 6"

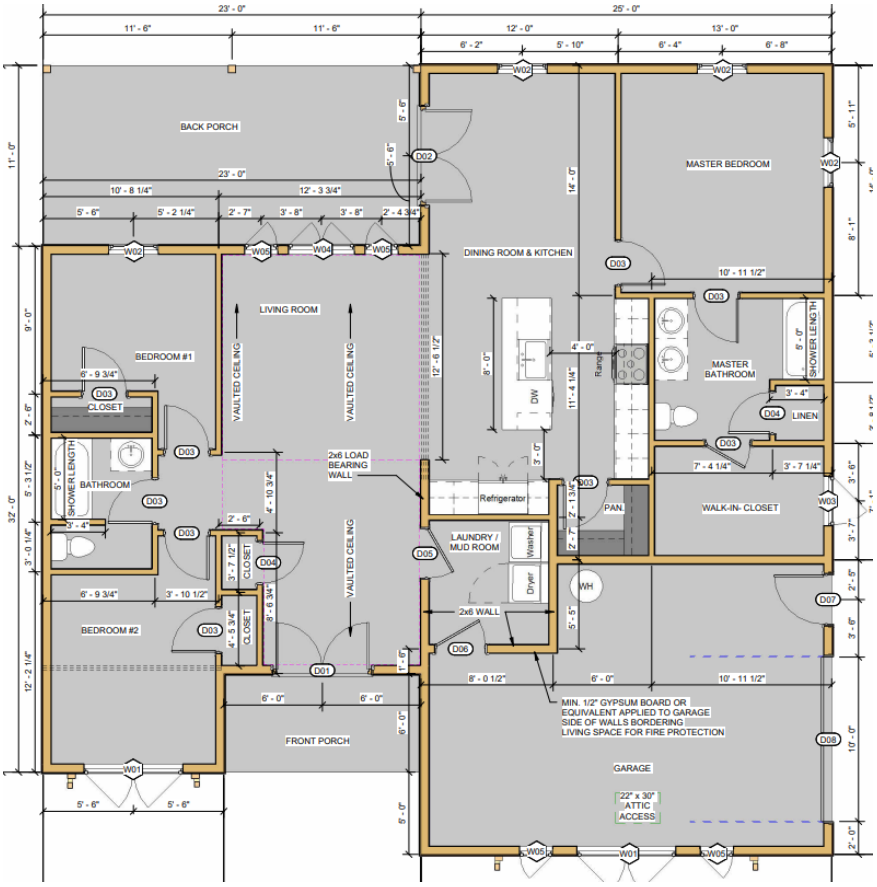

Door Schedule

Mark	Count	Size	Description	Header Size	Door Area
D01	1	6' - 0" x 6' - 8"	3/4 GLASS FRENCH DOOR	DBL. 2x12	42 SF
D02	1	6' - 0" x 6' - 8"	1/2 GLASS FRENCH DOOR	DBL. 2x12	42 SF
D03	9	2' - 8" x 6' - 8"	INT. WALKDOOR	DBL. 2x6	0 SF
D04	2	2' - 6" x 6' - 8"	INT. WALKDOOR	DBL. 2x6	0 SF
D05	1	3' - 0" x 6' - 8"	INT. WALKDOOR	DBL. 2x10	0 SF
D06	1	3' - 0" x 6' - 8"	SOLID PANEL W/SELF CLOSING HINGES	DBL. 2x10	0 SF
D07	1	3' - 0" x 6' - 8"	EXT. WALKDOOR	DBL. 2x10	21 SF
D08	1	10' - 0" x 8' - 0"	GARAGE DOOR	DBL. 11-7/8" LVL	82 SF
					187 SF

Window Schedule

Mark	Count	Size	Description	Header Size	Window Area
W01	2	6' - 0" x 5' - 0"0	TWIN CASEMENT	DBL. 2x12	61 SF
W02	4	3' - 0" x 5' - 6"0	SINGLE HUNG	DBL. 2x10	67 SF
W03	1	3' - 0" x 5' - 0"0	CASEMENT	DBL. 2x10	15 SF
W04	1	4' - 0" x 5' - 0"0	TWIN CASEMENT	DBL. 2x10	20 SF
W05	4	2' - 0" x 5' - 0"0	CASEMENT	DBL. 2x10	41 SF
W06	1	2' - 0" x 5' - 0"0	FIXED	DBL. 2x10	10 SF
					216 SF

CABINET DESIGNS

KITCHEN

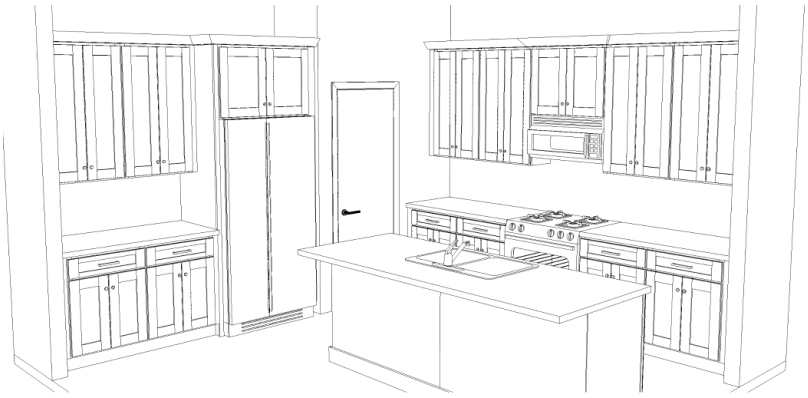

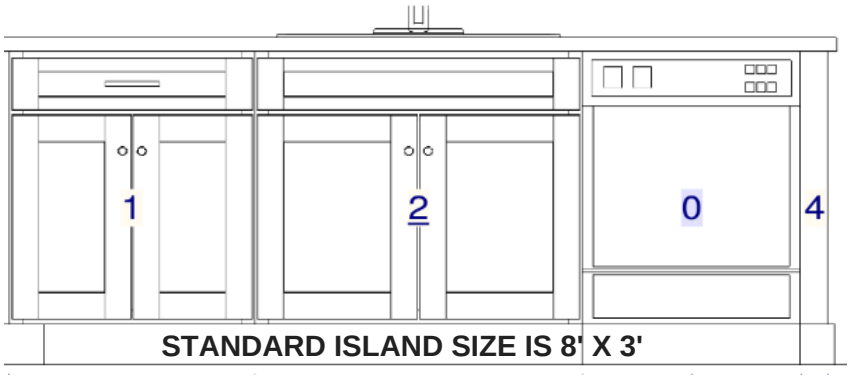

MASTER BATH

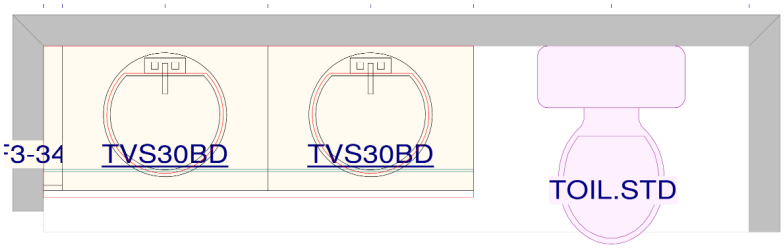

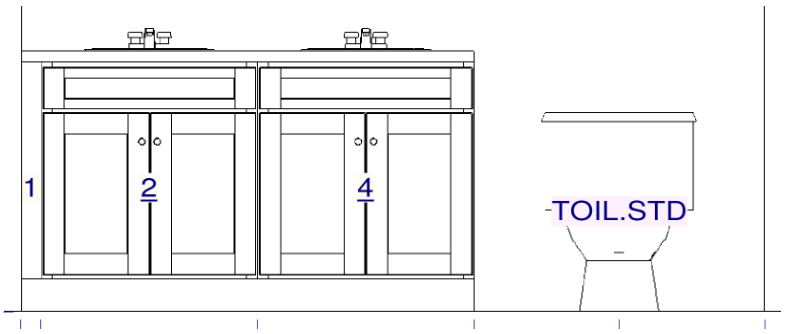
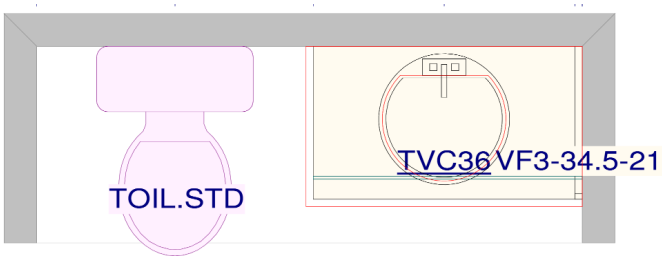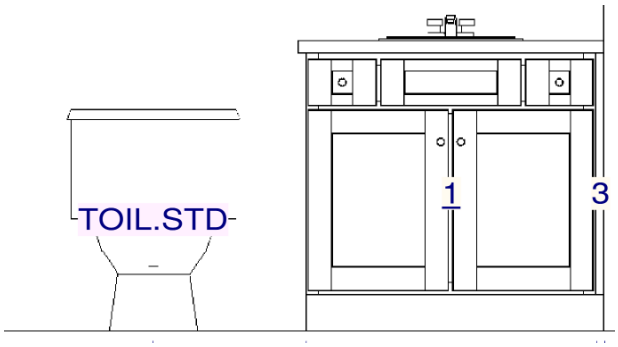
BATH 2