Drawings Prepared For:

Robertson Deluxe Home

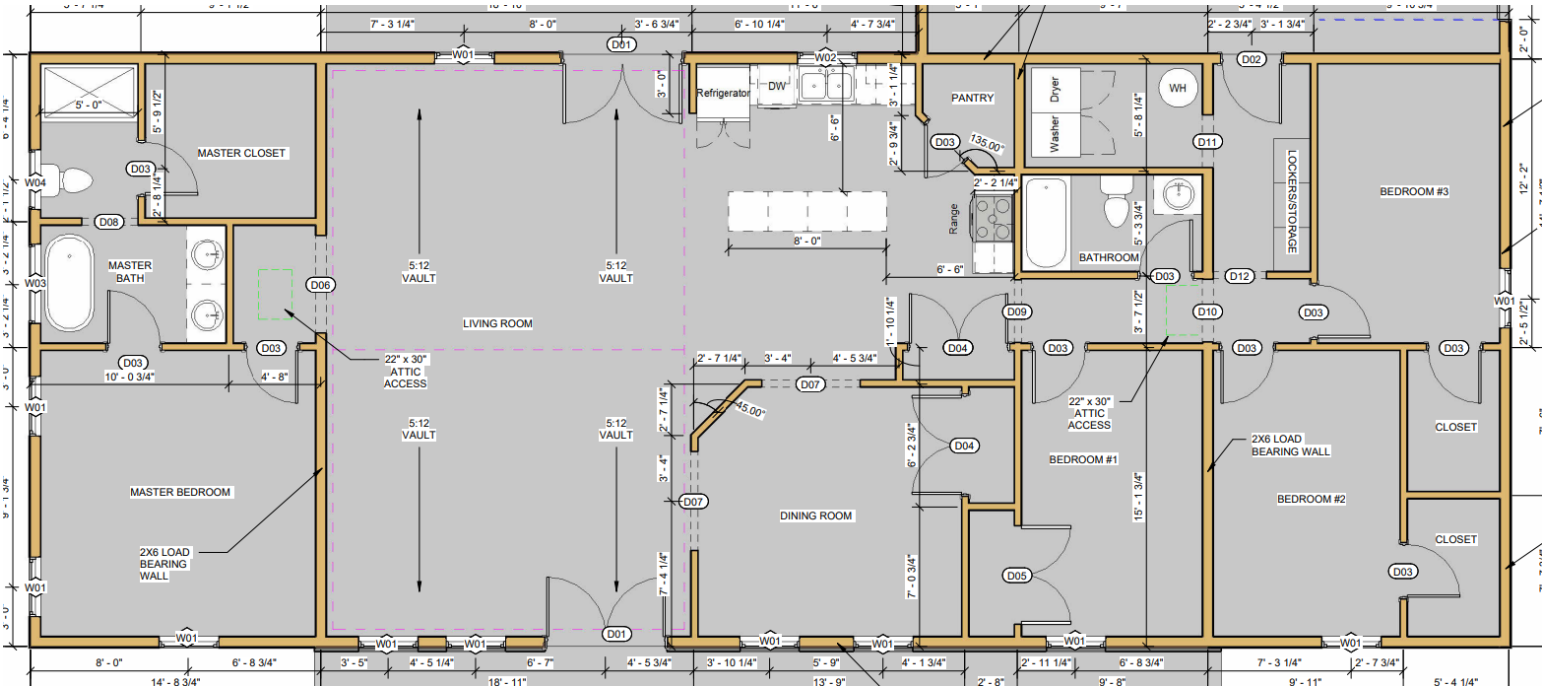

SQFT Schedule

Area	Mark
368 SF	Front Porch
300 SF	Back Porch
2250 SF	Living Area
900 SF	Garage

Cabinetry Length

Overall Length
43' - 3"

Door Schedule

Mark	Count	Size	Description	Header Size	Door Area
D01	2	6' - 0" x 6' - 8"	Ext. French Door	(2) 2x12	83 SF
D02	1	3' - 0" x 6' - 8"	Solid Core W/Self Closing Hinges	(2) 2x10	0 SF
D03	10	2' - 8" x 6' - 8"	Int. Walk Door	(2) 2x6	0 SF
D04	2	5' - 0" x 6' - 8"	Int. Dbl Door	(2) 2x10	0 SF
D05	1	5' - 0" x 6' - 8"	Int. Dbl Door Load Bearing	(2) 2x12	0 SF
D06	1	5' - 0" x 6' - 8"	Int. Finished Opening Load Bearing	(2) 2x12	0 SF
D07	2	5' - 0" x 6' - 8"	Int. Finished Opening	(2) 2x10	0 SF
D08	1	2' - 10" x 6' - 8"	Int. Finished Opening	(2) 2x6	0 SF
D09	1	3' - 2" x 6' - 8"	Int. Finished Opening	(2) 2x6	0 SF
D10	1	3' - 2" x 6' - 8"	Int. Finished Opening Load Bearing	(2) 2x10	0 SF
D11	1	2' - 8" x 6' - 8"	Int. Finished Opening Load Bearing	(2) 2x10	0 SF
D12	1	2' - 8" x 6' - 8"	Int. Finished Opening	(2) 2x6	0 SF
D13	1	3' - 0" x 6' - 8"	Ext. Entry Door	(2) 2x10	21 SF
D14	2	9' - 0" x 8' - 0"	Garage Door	(2) 11 7/8" LVL	144 SF
					249 SF

Window Schedule

Mark	Count	Size	Description	Header Size	Window Area
W01	11	3' - 0" x 5' - 6"0	Single Hung	(2) 2x10	185 SF
W02	1	3' - 0" x 3' - 0"0	Single Hung	(2) 2x10	9 SF
W03	1	4' - 0" x 4' - 0"0	Fixed Temp	(2) 2x10	16 SF
W04	1	3' - 0" x 3' - 0"0	Fixed Temp	(2) 2x10	9 SF
W06	2	2' - 0" x 3' - 0"0	Fixed	(2) 2x6	12 SF
					233 SF

ROBERTSON DELUXE CABINET DESIGNS

KITCHEN

ISLAND

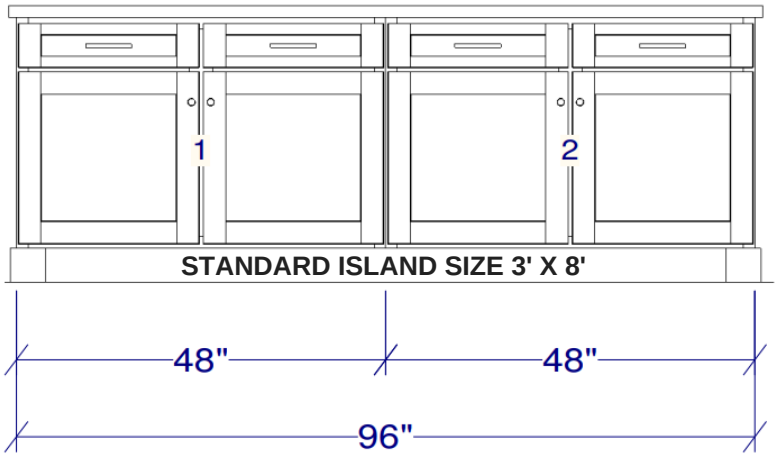

MASTER BATH

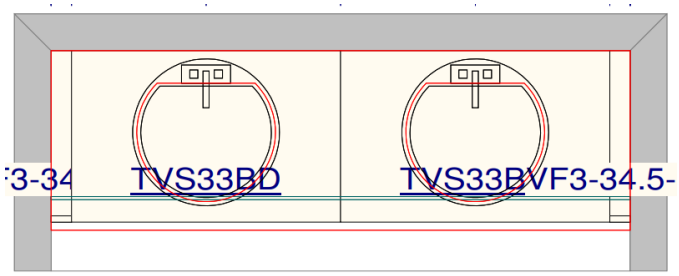

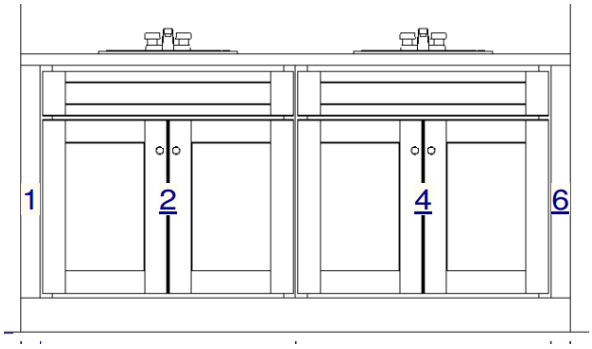
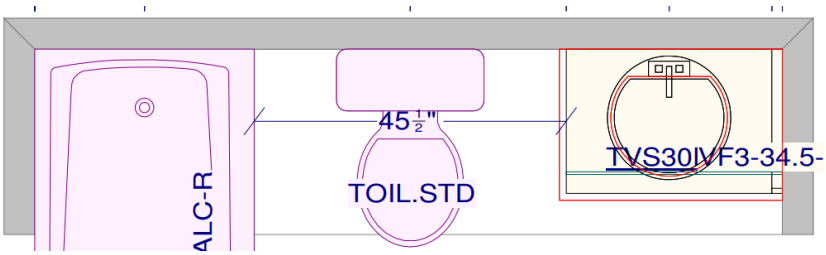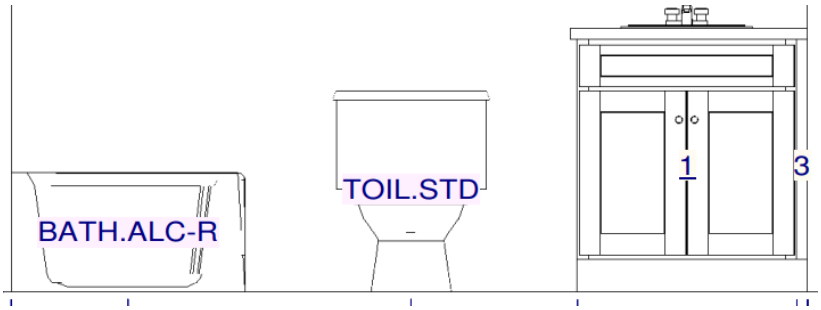
GUEST BATH