SQFT Schedule	
Area	Name
675 SF	Porch
2295 SF	Living Area
3455 SF	Garage
10 SF	Fireplace Support

Drawings Prepared For:

Liberty Grove

Cabinetry Length
Overall Length
49' - 0"

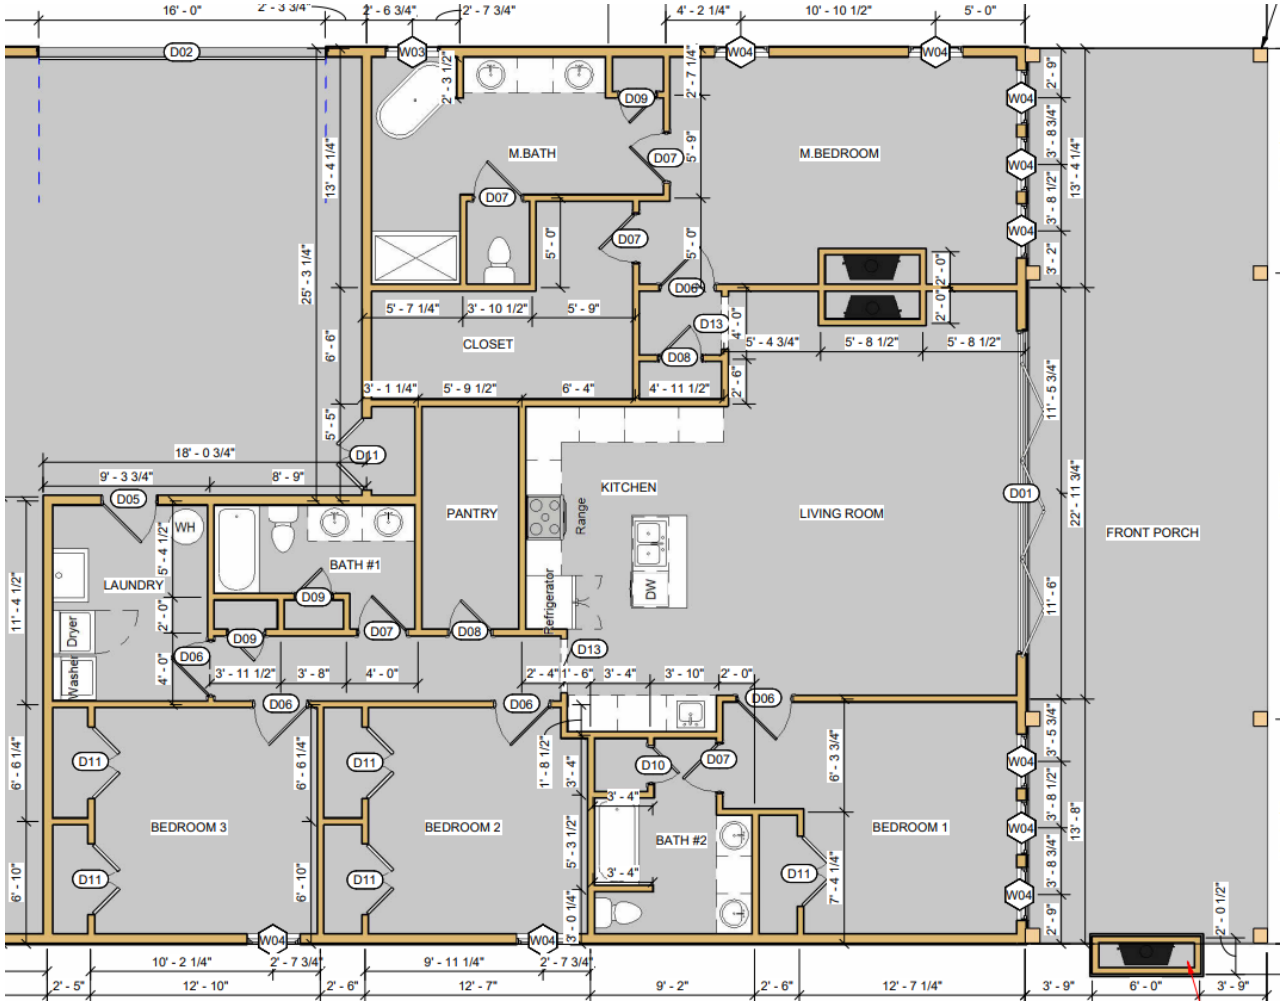

Door Schedule

Mark	Count	Size	Description	Header Size	Door Area
D01	1	18' - 0" x 8' - 0"	FOLDING GLASS DOOR	(2)11 7/8" LVL	144 SF
D02	1	16' - 0" x 8' - 0"	GARAGE DOOR	(2)18" LVL	131 SF
D03	3	12' - 0" x 12' - 0"	GARAGE DOOR	(2)14" LVL	441 SF
D04	2	3' - 0" x 7' - 0"	EXT. DOOR	(2) 2X10	45 SF
D05	1	3' - 0" x 6' - 8"	EXT. DOOR WITH SELF CLOSING HINGE	(2) 2X10	0 SF
D06	5	3' - 0" x 8' - 0"	INT. DOOR	(2)2X6	0 SF
D07	5	2' - 8" x 8' - 0"	INT. DOOR	(2)2X6	0 SF
D08	2	2' - 4" x 8' - 0"	INT. DOOR	(2)2X6	0 SF
D09	3	2' - 0" x 6' - 8"	INT. DOOR	(2)2X6	0 SF
D10	1	2' - 0" x 6' - 8"	INT. DOOR	(2)2X6	0 SF
D11	6	4' - 0" x 8' - 0"	INT. DOUBLE	(2)2X6	0 SF
D13	2	3' - 0" x 8' - 0"	WALL OPENING	(2)2X6	0 SF
					761 SF

Window Schedule

Mark	Count	Size	Description	Header Size	Window Area
W01	2	5' - 7" x 1' - 0"0	CUSTOM ARCHED WINDOW	(2) 2X10	24 SF
W02	1	5' - 11" x 2' - 2"0	CUSTOM ARCHED WINDOW	(2) 2X10	15 SF
W03	1	3' - 0" x 4' - 0"0	FIXED TEMPERED	(2) 2X10	12 SF
W04	10	3' - 0" x 6' - 0"0	SINGLE HUNG		184 SF
					235 SF

LIBERTY GROVE CABINET DESIGNS

KITCHEN

UPGRADED ISLAND SIZE SHOWN

KITCHEN PREP SINK WALL

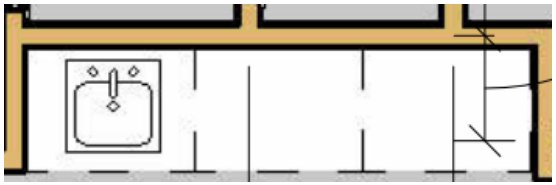

ISLAND

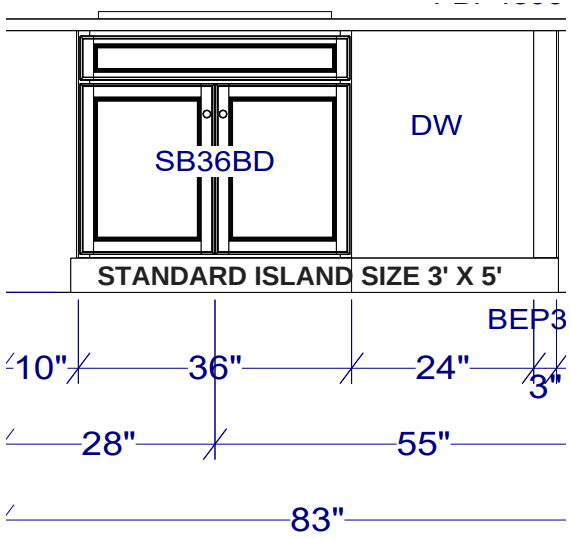

BATH 1

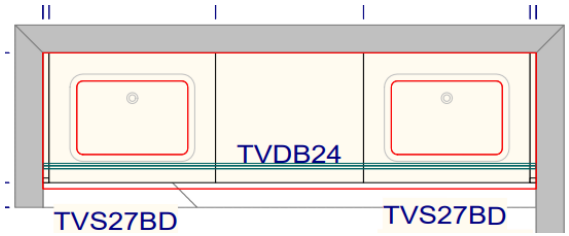

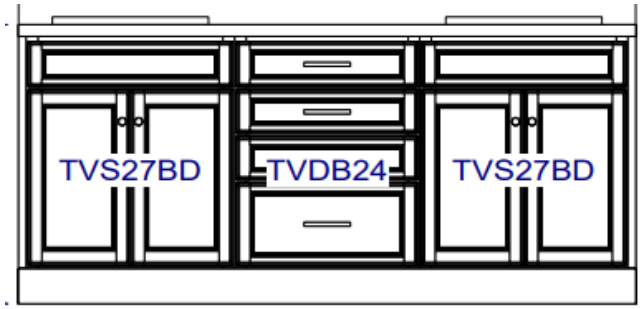

MASTER BATH

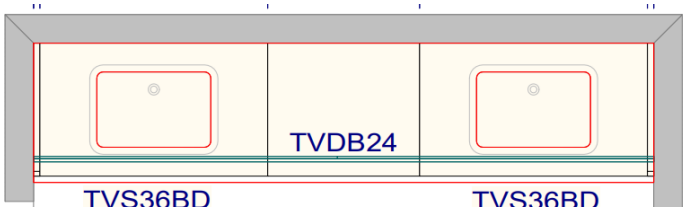

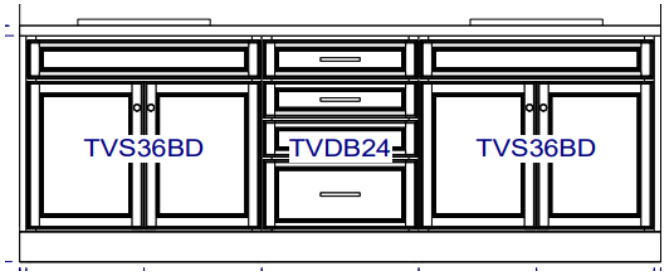
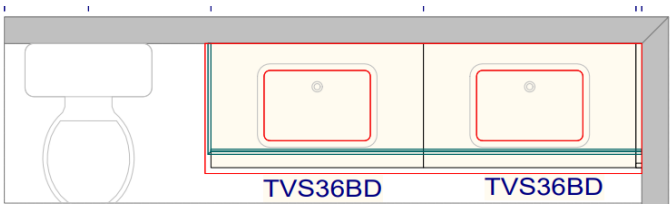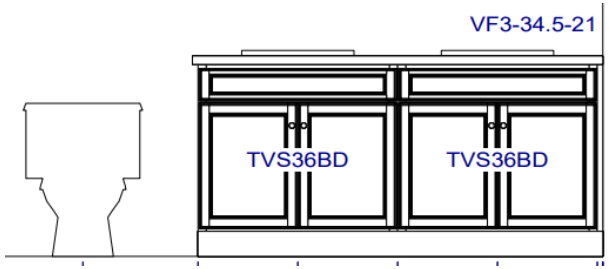
BATH 2