Drawings Prepared For:

The Southern Monitor

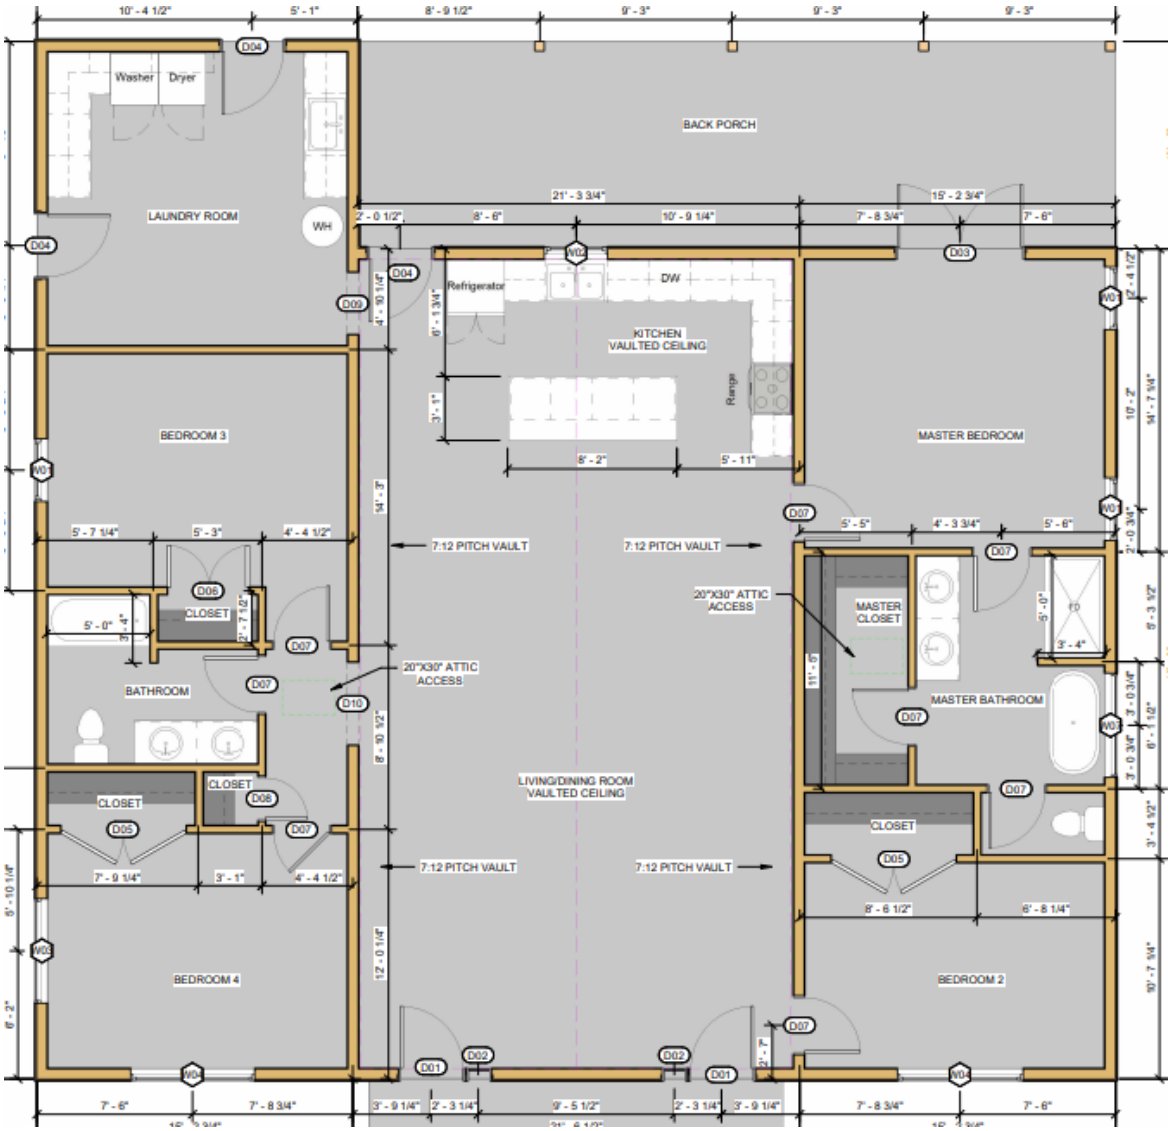

SQFT Schedule

Area	Name
2235 SF	MAIN LIVING AREA
200 SF	FRONT PORCH
365 SF	BACK PORCH

Cabinetry Length

Overall Length
90' - 6"

Door Schedule

Mark	Count	Size	Description	Header Size	Door Area
D01	2	3' - 0" x 6' - 8"	EXT. DOOR W/ SIDE LITE	(2) 2X10	43 SF
D02	2	1' - 0" x 6' - 8"	SIDE LITE	(2) 2X10	16 SF
D03	1	6' - 0" x 6' - 8"	FRENCH DOOR	(2) 2X10	42 SF
D04	3	3' - 0" x 6' - 8"	EXT. DOOR	(2) 2X10	64 SF
D05	2	6' - 0" x 6' - 8"	INT. DBL DOOR	(2) 2X6	0 SF
D06	1	4' - 0" x 6' - 8"	INT. DBL DOOR	(2) 2X6	0 SF
D07	8	2' - 8" x 6' - 8"	INT. DOOR	(2) 2X10	0 SF
D08	1	2' - 0" x 6' - 8"	INT. DOOR	(2) 2X6	0 SF
D09	1	3' - 0" x 6' - 8"	WALL OPENING	(2) 2X10	0 SF
D10	1	4' - 0" x 6' - 8"	WALL OPENING	(2) 2X10	0 SF
					164 SF

Window Schedule

Mark	Count	Size	Description	Header Size	Window Area
W01	3	3' - 0" x 5' - 6"0	SINGLE HUNG		51 SF
W02	1	3' - 0" x 3' - 0"0	SINGLE HUNG	(2) 2x10	9 SF
W03	1	5' - 0" x 1' - 8"0	FIXED TRANSOM	(2) 2x10	9 SF
W04	2	6' - 0" x 5' - 6"0	3/0 x 5/6 TWIN SINGLE HUNG	(2) 2x10	67 SF
W05	10	4' - 0" x 2' - 0"0	FIXED	(2) 2x10	83 SF
W06	2	5' - 0" x 5' - 6"0	FIXED TRAPEZOID	(2) 2x12	66 SF
W07	1	5' - 0" x 5' - 0"0	FIXED TEMP WINDOW	(2) 2x12	25 SF
					309 SF

THE SOUTHERN MONITOR CABINET DESIGNS

KITCHEN

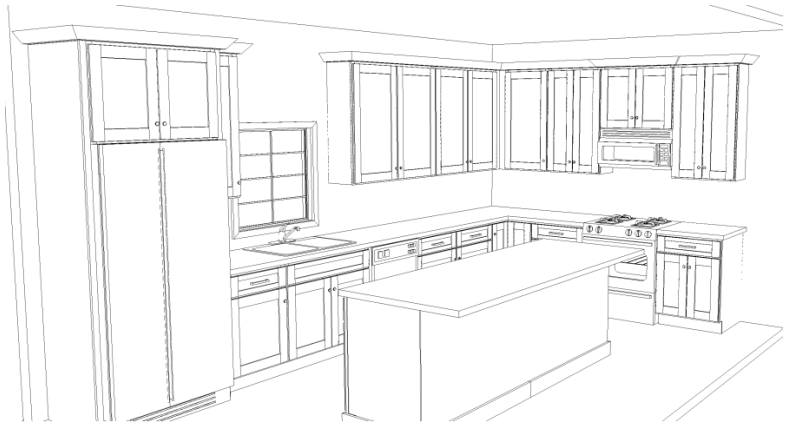

ISLAND

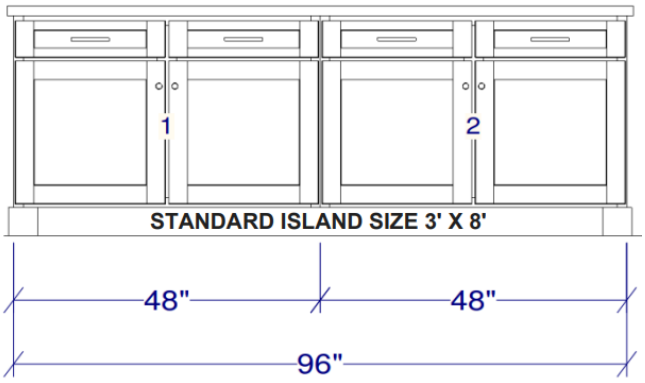

LAUNDRY

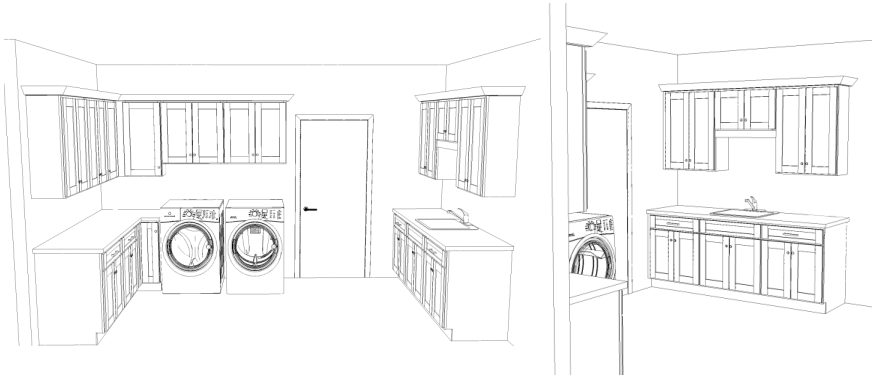

MASTER BATH

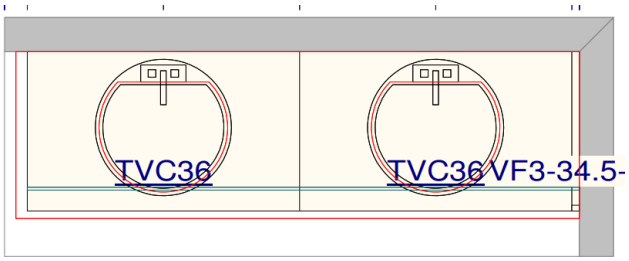

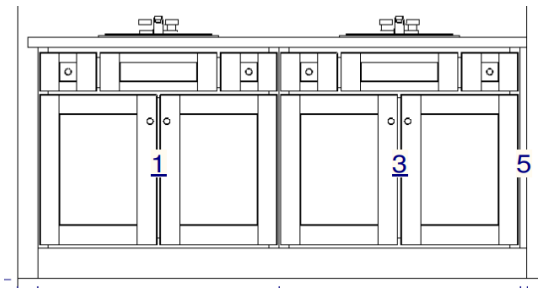
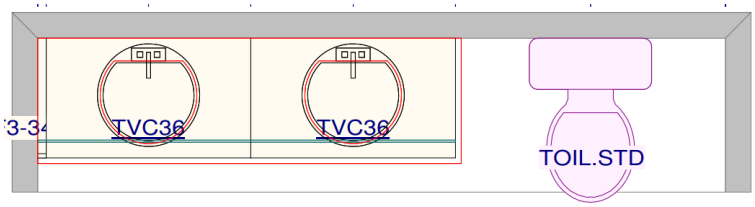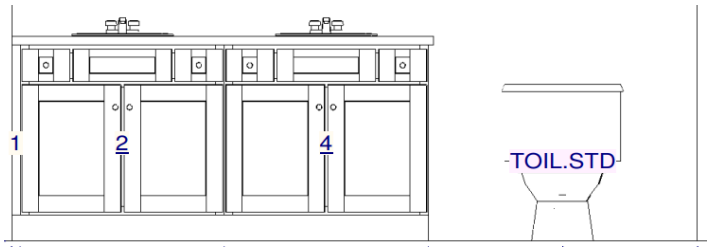
BATH 2