Drawings Prepared For:

Thompson House

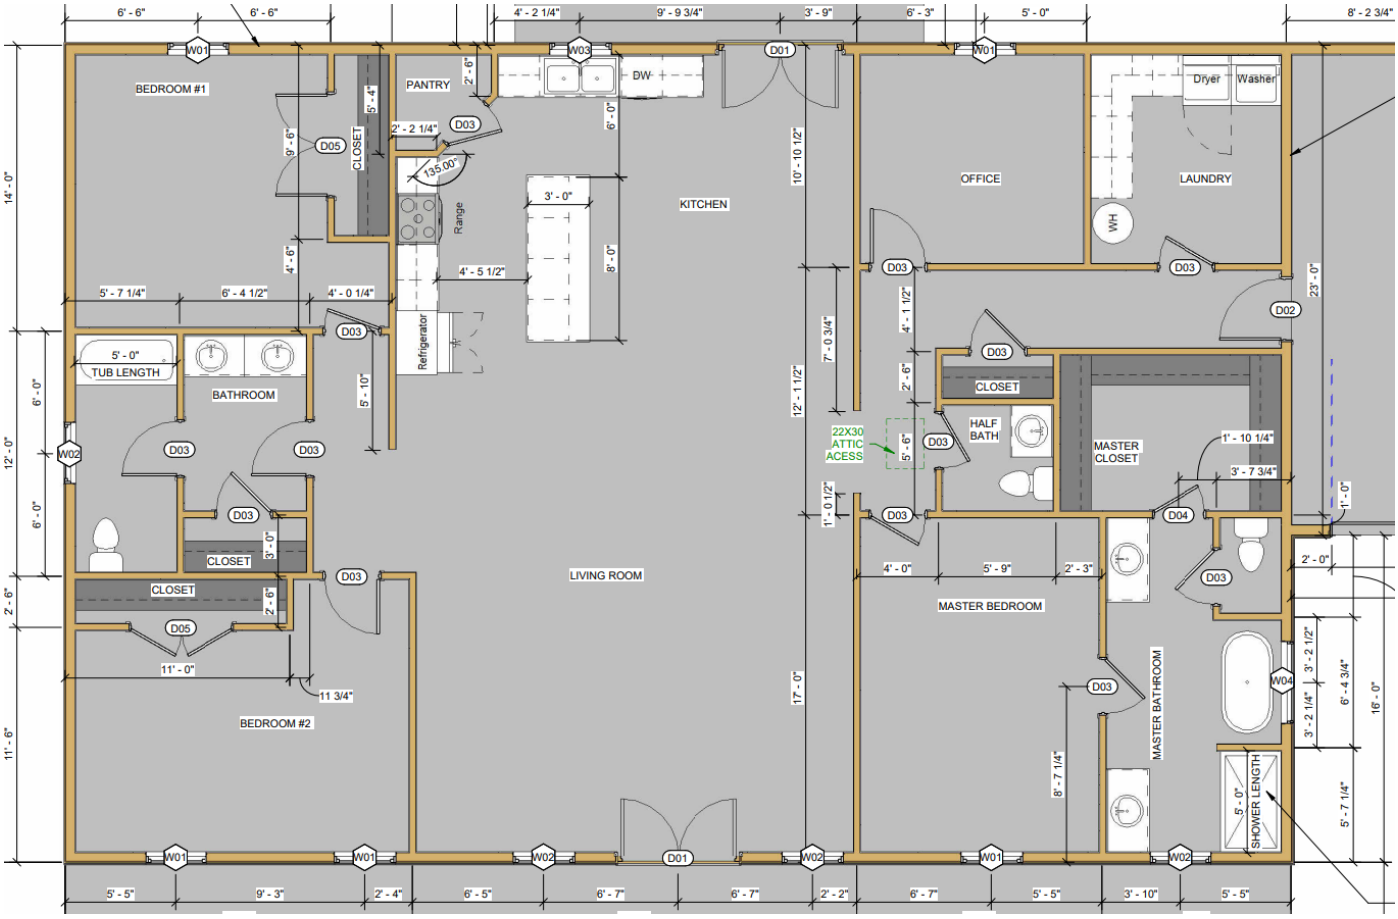

Door Schedule

Mark	Count	Size	Description	Header Size	Door Area
D01	2	6' - 0" x 6' - 8"	Exterior French Door	(2) 2x12	83 SF
D02	1	3' - 0" x 6' - 8"	Solid Panel Door w/ Self Closing Hinges	(2) 2x10	0 SF
D03	13	2' - 8" x 6' - 8"	Interior Door	(2) 2x6	0 SF
D04	1	2' - 6" x 6' - 8"	Interior Door	(2) 2x6	0 SF
D05	2	5' - 0" x 6' - 8"	Interior French Door	(2) 2x6	0 SF
D06	2	10' - 0" x 8' - 0"	Garage Door	(2) 1-3/4" x 11-7/8" LVL	164 SF
					248 SF

Cabinetry Length

Width
78' - 11"

Window Schedule

Mark	Count	Size	Description	Header Size	Window Area
W01	8	3' - 0" x 5' - 6"0	Single Hung Window	(2) 2x10	135 SF
W02	4	3' - 0" x 5' - 6"0	Single Hung Window **Temp**	(2) 2x10	67 SF
W03	1	3' - 0" x 3' - 0"0	Single Hung Window	(2) 2x10	9 SF
W04	1	4' - 0" x 4' - 0"0	Fixed **Temp**	(2) 2x10	16 SF
					228 SF

SQFT Schedule

Area	Name
2400 SF	LIVING SPACE
624 SF	GARAGE
480 SF	FRONT PORCH
360 SF	BACK PORCH

THOMPSON HOUSE CABINET DESIGNS

KITCHEN

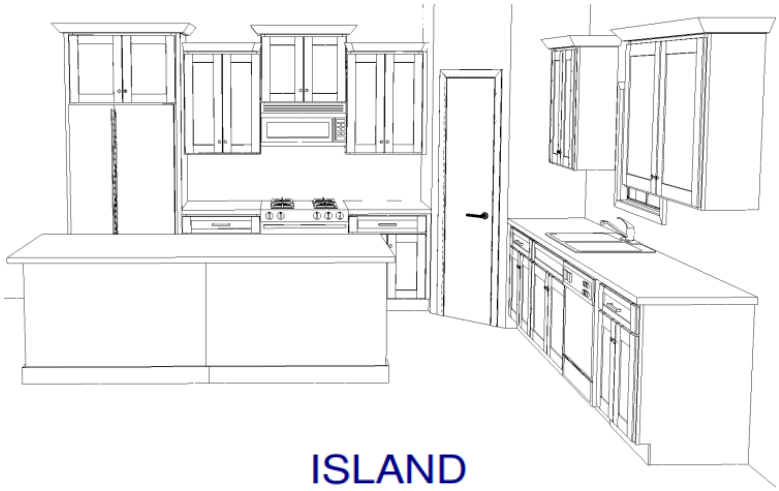

ISLAND

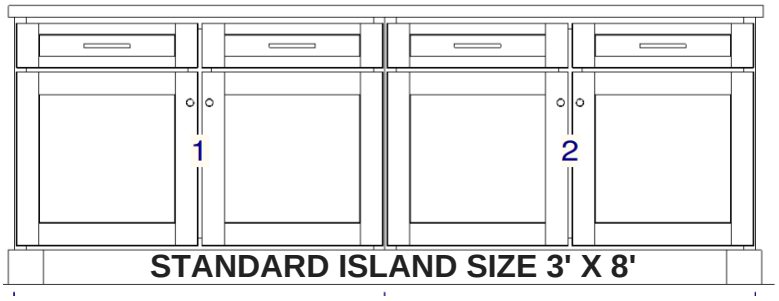

LAUNDRY

MASTER BATH

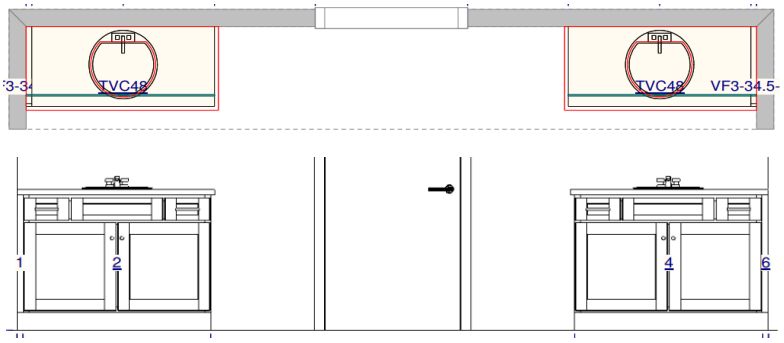

JACK AND JILL BATH

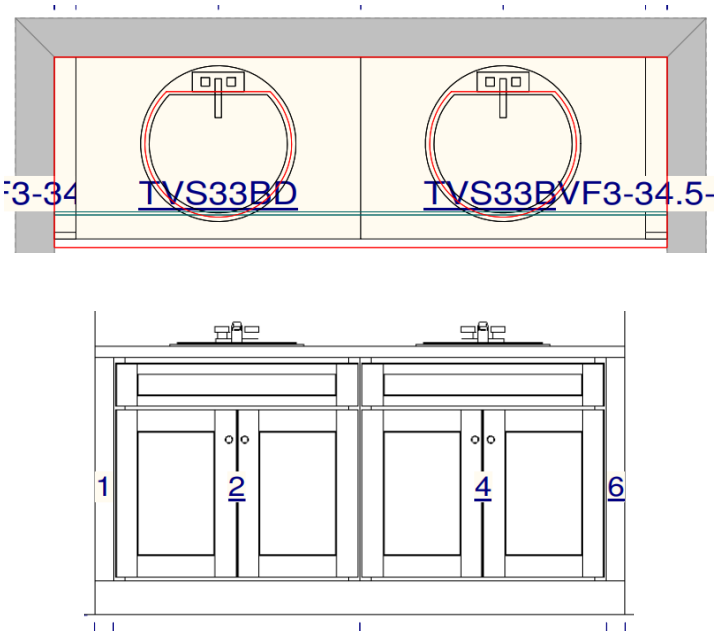
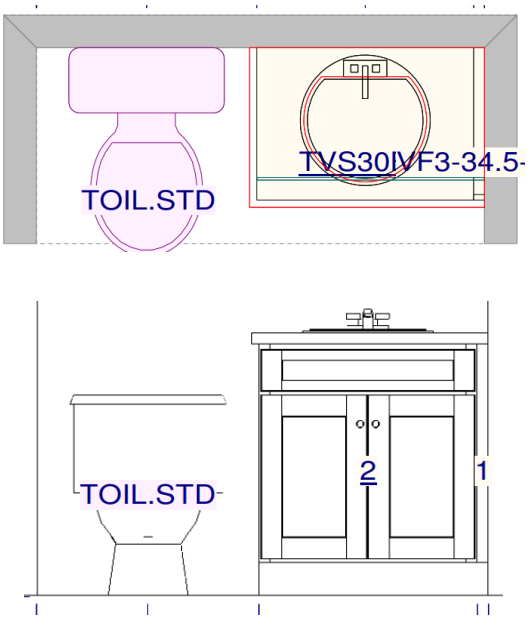
HALL BATH